

新昌悦邦国际卡箍产品册


YUE BANG

product catalogue - clamp



ETUKUNI

了解我们 KNOW MORE ABOUT US

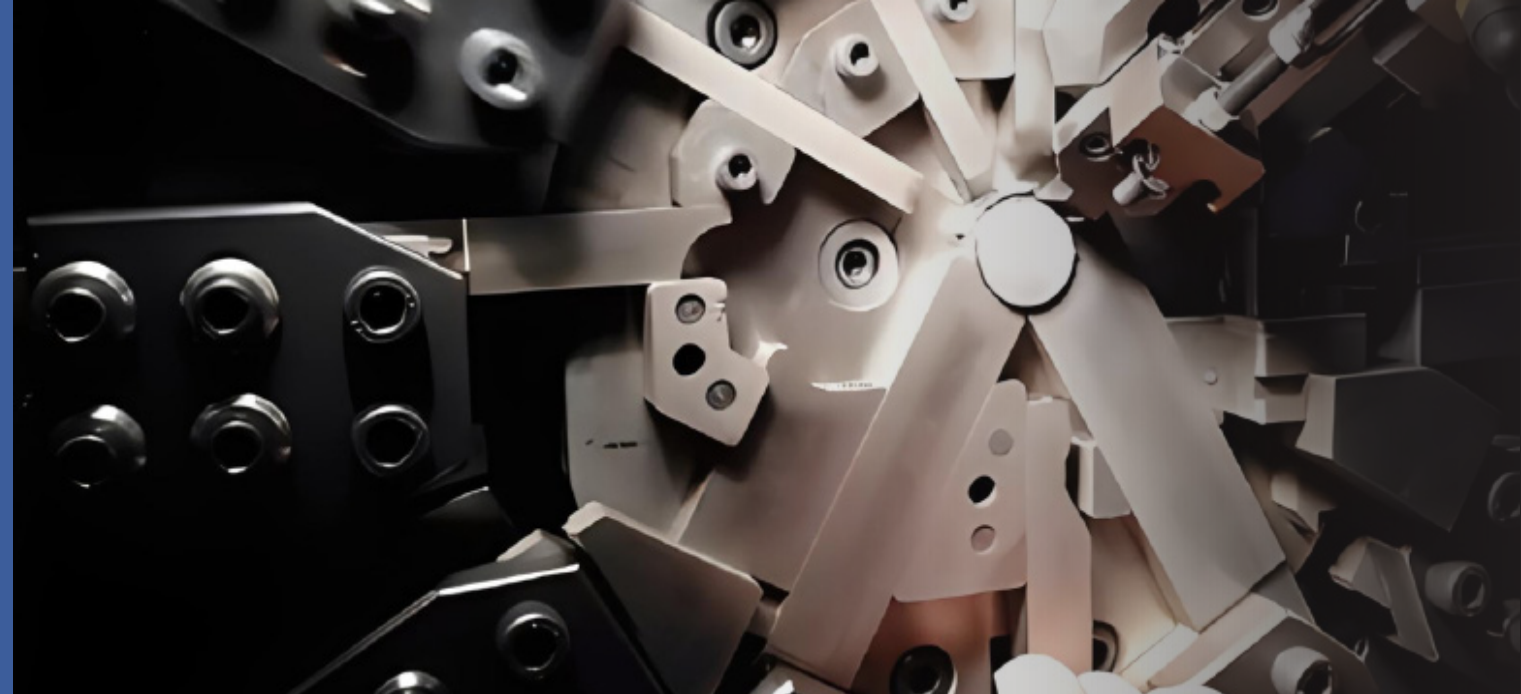

经营理念：
Business philosophy

诚信、热情、进取、务实
integrity, enthusiasm, enterprising, pragmatic



公司愿景
Company vision：

兼顾客户和公司的利益才是发展
Development is taking into account the interests of customers and the company



公司目标
Company purpose：

质量和交货期第一，客户放心，优化成本
Quality and delivery time first, customer rest assured, optimize costs

01-17 ABOUT US 关于我们

- 04 公司简介
Company profile
- 06 工厂介绍
Factory Introduction
- 08 产品检测
Product testing
- 10 公司团队
Company Team
- 12 合作优势
Cooperation advantages
- 16 发展历程
Development history

18-49 PRODUCT 产品介绍

- 18 强力卡箍
Strength clamp
- 21 真空卡箍
Clamping type vacuum quick release flangeclamp
- 22 通径卡箍
Exhausted clamp
- 24 U 型管夹
Strength clamp
- 26 钢丝锁头
Stainless steel wire rope lock head
- 27 鸡心环
German type symmetry housing with bandwidth 9mm
- 28 德式卡箍
German type hose clamp
- 30 美式卡箍
American type hose clamp
- 34 微型卡箍
Mini hose clamp
- 38 其他卡箍
Another type clamp

COMPANY PROFILE

公司简介

悦邦国际成立于 2015 年，是一家集产品设计，方案规划，项目落地为一体的专业工贸一体公司，专业攻克卡箍，定制件难题。占地面积 30000 平方米，拥有员工 250 余人，拥有独立成熟的方案定制体系；经手百余件项目任务的专业团队，拥有庞大的资源库；使得业务能够服务于全球数百家客户。



Yuebang International was founded in 2015 and is a professional industrial and trade integrated company that integrates product design, scheme planning, and project implementation. We specialize in solving problems related to clamps and customized parts.

Covering an area of 30000 square meters, with over 250 employees and an independent and mature customized solution system; A professional team that handles over a hundred project tasks and possesses a vast resource library; Enable the business to serve hundreds of customers worldwide.



FACTORY STRENGTH DISPLAY

工厂介绍

● 工厂优势

我们生产过市面上多种产品，精通各种制造产品的市场趋势；我们能够根据实际情况，从众多系列产品中为客户推荐出综合实力最优秀的产品。

● Factory advantages

We have produced various products on the market and are proficient in the market trends of various manufacturing products; We can recommend the most comprehensive and excellent products to customers from numerous series of products based on actual situations.



ETUKUNI

- 1. 提供质量合规的产品：对标日本的生产标准，有完善的质量体系。

Provide quality compliant products: examine their production technology, experience, equipment, and quality system.

- 多条生产流水线，能够在保证产品质量的情况下，快速生产出所需产品

Multiple production lines can quickly produce the required products while ensuring product quality

- 不定期地对生产现场进行审查并报告。

Conduct periodic inspections and reports on the production site.




检测 · 先进精正

Our departments include Technical Department, Sales Department, Purchasing Department, Research and Development Department, after-sales department and logistics Department. The division of labor of each department is clear and interrelated, and each proposal is treated from an overall perspective,

每一款产品在制造工艺上都寻求细节的完美，在生产制造中全面引入数码技术，以工业时代的严谨与数码科技的精细完美结合，实现品质更精湛，设计更完美，质量更可靠。产品推出市场前，我们给予的是细心照料和严格检验，惟其如此，才能真正保证产品的品质。

Regarding every product, the company, by combining the rigorousness and preciseness of the industrial age with the elaboration and perfection of digital technology, seeks perfect details in the manufacturing process and brings in full digital technology in the process of manufacturing, realizing more exquisite quality, more perfect design and more reliable quality.

We are dedicated to meticulous care and rigorous inspection before promotion of the products into the market, only in which way can we truly guarantee the high quality of the products.

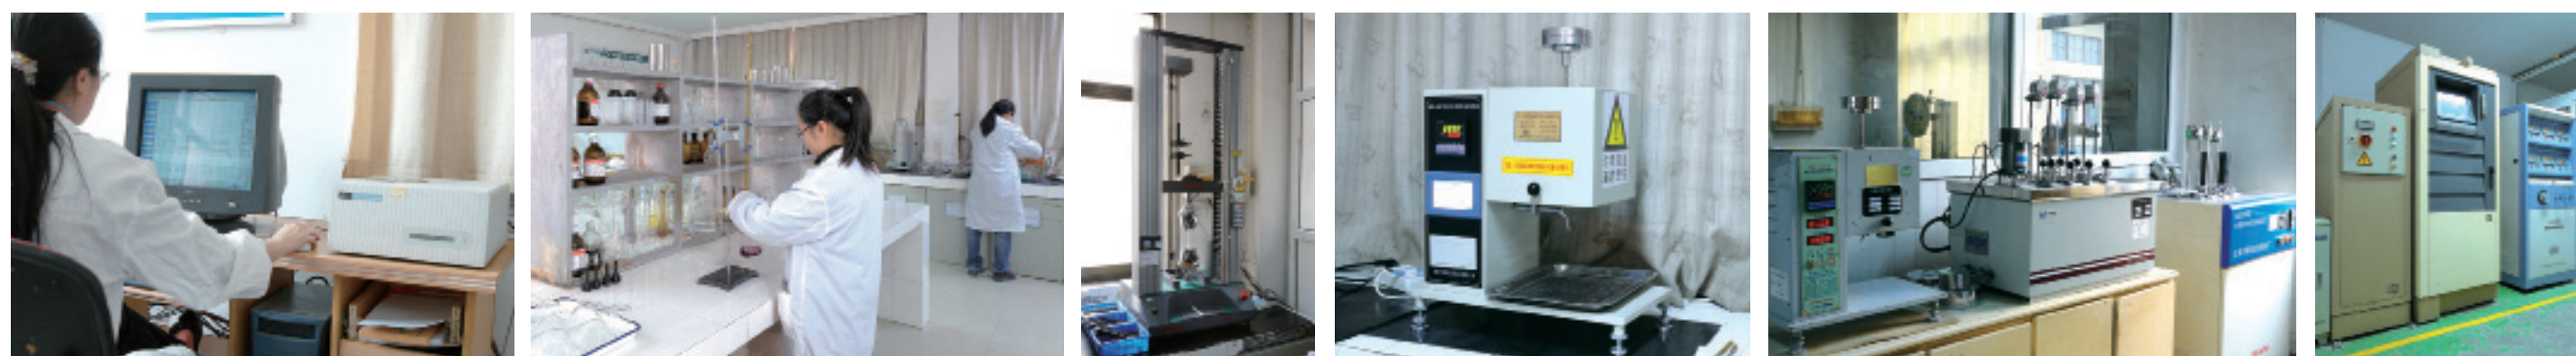

检测程序

Detection procedure

1

原料入库检查
Warehousing
inspection of raw
materials

2

原料合格抽检
Qualification spot
check of raw materials

3

开机首检
First inspection upon
startup

4

质检员巡检
In-process inspection
by quality controller

5

成品检测
Detection of finished
products

6

入库检验
Inspection upon
warehousing

7

仓库抽检
Spot check in
warehouse

8

出厂检测
Detection upon
delivery

OUR COMPANY TEAM

我们的公司团队

ETUKUNI



● Company Display

Our departments include the procurement department, research and development department, production department, quality department, marketing department, after-sales department, and logistics department. Each department has clear division of labor, is interrelated, and views each proposal from a holistic perspective.



professional team

专业的团队

● Sales team

The sales department recommends high-quality products based on the situation, records the satisfaction of customer needs, and maintains a good credit transaction record for high-quality product solutions. The cumulative sales revenue of various products has reached 150 million yuan

● R&D Production Team

The R&D department leads a team focused on product development and production, as well as technological breakthroughs in customized products, constantly keeping up with market trends and maintaining a leading position in the industry.

Our company will provide high-quality and stable products with the most sincere attitude and first-class service level, striving to become the first choice for customers.



服务内容

SERVICE CONTENT

常见问题 / Customer Focus Q&A

Q: Do you have a pricing advantage when purchasing products from your company compared to other companies?

A: We are a source manufacturer with a professional procurement team to control the quality and price of raw materials, which can save a lot of costs and gain a good price advantage.

Q: If we don't choose a large factory, can we guarantee product quality?

A: Our company's product quality is benchmarked against Japanese production standards and we are the source supplier for many Japanese companies. Our R&D department, production department, and quality department all have professional capabilities. During the product development phase, our technicians conduct strict on-site inspections of the factory and implement full process monitoring to ensure compliance during the production process. We will only ship the product after conducting a comprehensive inspection as needed to ensure quality.

Q: How to ensure timely delivery?

A: We have sufficient production lines, and the production department will track the production status of orders in real time. Customers can stay in touch with us at any time and track project progress.

Q: How to solve after-sales problems?

A: If there are any issues with the product, please contact us as soon as possible, and our after-sales team will promptly provide a solution



我们的优势 / OUR STRENGTHS

Experienced

We have customers all over the world, have produced various products, and have accumulated sales of 150 million yuan. We have rich project experience

Reasonable price

Our factory strictly passes factory audits, and various automated production lines result in high production efficiency. Therefore, we always provide customers with high-quality products at friendly prices.

Good Service

We have an experienced sales team to serve you, providing 24/7 customer service and quick solutions, striving to bring the most sincere service to customers.

Superior quality

We have a professional quality control team that conducts inspections from pre production, intermediate production, and final production to ensure that all products, from raw materials to final products, are of high quality and in good condition.

Flexible product line

In addition to our main basic products, we also provide OEM or ODM services, so you can purchase products in any related field from us.





● RICH PROJECT EXPERIENCE

Our company has provided products to enterprises around the world, with rich project experience and the ability to provide tailored solutions for every customer.

● PROVIDE OEM&ODM SERVICES

In addition to our main basic products, we can also provide OEM or ODM services according to customer requirements. We have a professional R&D engineering team to support every different requirement.




● 使用场景 / Usage scenarios



卡箍 pipe clamp

有效地解决小直径软硬管连接时出现死角，和产生液体和气体泄漏问题。

Effectively solve the problem of dead corners when the small diameter soft and hard pipe is connected, and the problem of liquid and gas leakage.

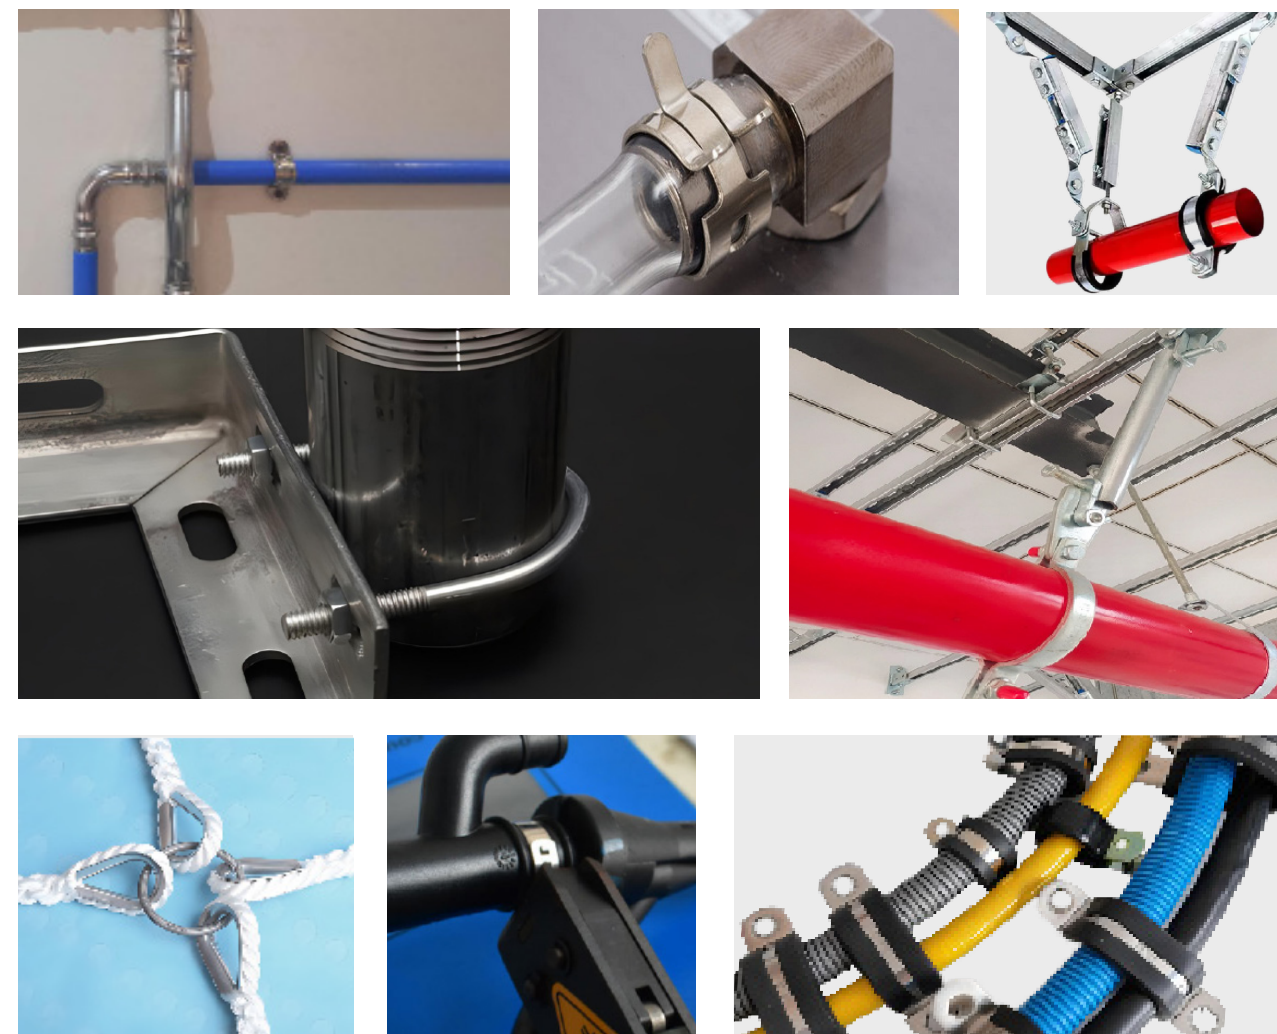

Enterprise development trend

Since its establishment, Yuebang International has developed at an astonishing speed. On the basis of a professional team and solid technical equipment, the enterprise has established a comprehensive service system and business processes at the beginning of its entrepreneurship, and the future industrial scale is promising



单头强力喉箍
Robust clamp




Automobile water pipe joint, gas pipe joint, oil pipe joint, petroleum, chemical industry,daily life.

HDK

Model No. hollow trunnion

HDS

Model No. solid trunnion

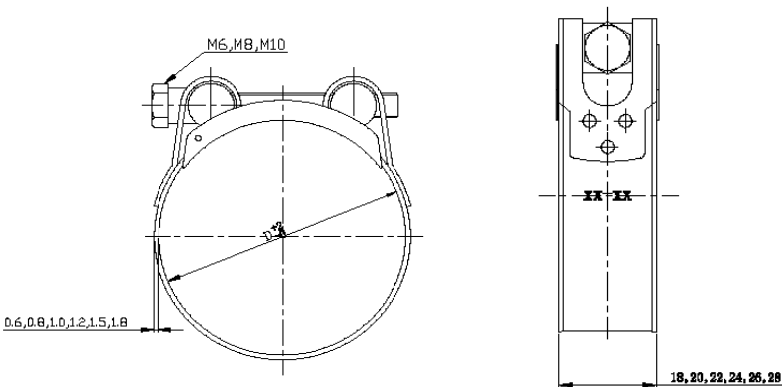

Effectively solve the problem of dead corner and liquid and gas leakage during small diameter soft and hard connections.

No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

No.	CODE		Clamping range (mm)	Bolt size	pcs/carton	Carton dimension(cm)
1	HDK181719-0.6	HDS181719-0.6	17-19	M5*40	250	37*20*11
2	HDK182022-0.6	HDS182022-0.6	20-22		250	38*27*11
3	HDK182325-0.6	HDS182325-0.6	23-25		250	38*27*13
4	HDK182628-0.6	HDS182628-0.6	26-28		250	38*27*19
5	HDK202931-0.6	HDS202931-0.6	29-31	M6*50	200	38*27*13
6	HDK203235-0.6	HDS203235-0.6	32-35		250	38*27*15
7	HDK203639-0.6	HDS203639-0.6	36-39		250	38*27*18.5
8	HDK204043-0.6	HDS204043-0.6	40-43		250	38*27*17.5
9	HDK202931-0.8	HDS202931-0.8	29-31	M6*50	200	38*27*20.5
10	HDK203235-0.8	HDS203235-0.8	32-35		250	38*27*24
11	HDK203639-0.8	HDS203639-0.8	36-39		250	38*27*34
12	HDK204043-0.8	HDS204043-0.8	40-43		250	40*37*27.5
13	HDK224447-0.6	HDS224447-0.6	44-47	M6*60	100	40*37*30
14	HDK224851-0.6	HDS224851-0.6	48-51		100	40*37*35
15	HDK225255-0.6	HDS225255-0.6	52-55		100	40*37*22
16	HDK225659-0.6	HDS225659-0.6	56-59		100	40*37*24
17	HDK226063-0.6	HDS226063-0.6	60-63	M6*55	100	40*37*26
18	HDK226467-0.6	HDS226467-0.6	64-67		100	40*37*26
19	HDK224447-1.2	HDS224447-1.2	44-47		100	40*37*30
20	HDK224851-1.2	HDS224851-1.2	48-51		100	40*37*30
21	HDK225255-1.2	HDS225255-1.2	52-55	M8*70	100	40*37*35
22	HDK225659-1.2	HDS225659-1.2	56-59		100	37*20*11
23	HDK226063-1.2	HDS226063-1.2	60-63		100	38*27*11
24	HDK226467-1.2	HDS226467-1.2	64-67		100	38*27*13
25	HDK246873-0.8	HDS246873-0.8	68-73	M8*70	100	38*27*19
26	HDK247479-0.8	HDS247479-0.8	74-79		100	38*27*13
27	HDK248085-0.8	HDS248085-0.8	80-85		100	38*27*15
28	HDK248691-0.8	HDS248691-0.8	86-91		100	38*27*18.5
29	HDK249297-0.8	HDS249297-0.8	92-97	M8*80	100	38*27*17.5
30	HDK2498103-0.8	HDS2498103-0.8	98-103		50	38*27*20.5
31	HDK24104112-0.8	HDS24104112-0.8	104-112		50	38*27*24
32	HDK24113121-0.8	HDS24113121-0.8	113-121		50	38*27*34
33	HDK24122130-0.8	HDS24122130-0.8	122-130	M8*70	50	40*37*27.5
34	HDK246873-1.5	HDS246873-1.5	68-73		100	40*37*30
35	HDK247479-1.5	HDS247479-1.5	74-79		100	40*37*35
36	HDK248085-1.5	HDS248085-1.5	80-85		100	40*37*22
37	HDK248691-1.5	HDS248691-1.5	86-91	M8*75	100	40*37*24
38	HDK249297-1.5	HDS249297-1.5	92-97		100	40*37*26
39	HDK2498103-1.5	HDS2498103-1.5	98-103		50	40*37*26
40	HDK24104112-1.5	HDS24104112-1.5	104-112		50	40*37*30
41	HDK24113121-1.5	HDS24113121-1.5	113-121	M10*90	50	40*37*30
42	HDK24122130-1.5	HDS24122130-1.5	122-130		50	40*37*35
43	HDK26131139-1.0	HDS26131139-1.0	131-139		50	37*20*11
44	HDK26140148-1.0	HDS26140148-1.0	140-148		50	38*27*11
45	HDK26149161-1.0	HDS26149161-1.0	149-161	M10*100	50	38*27*13
46	HDK26162174-1.0	HDS26162174-1.0	162-174		50	38*27*19
47	HDK26175187-1.0	HDS26175187-1.0	175-187		50	38*27*13
48	HDK26188200-1.0	HDS26188200-1.0	188-200		25	38*27*15
49	HDK26201213-1.0	HDS26201213-1.0	201-213	M10*85	25	38*27*18.5
50	HDK26214226-1.0	HDS26214226-1.0	214-226		25	38*27*17.5
51	HDK26227239-1.0	HDS26227239-1.0	227-239		25	38*27*20.5
52	HDK26240252-1.0	HDS26240252-1.0	240-252		25	38*27*24
53	HDK26131139-1.7	HDS26131139-1.7	131-139	M10*100	50	38*27*34
54	HDK26140148-1.7	HDS26140148-1.7	140-148		50	40*37*27.5
55	HDK26149161-1.7	HDS26149161-1.7	149-161		50	40*37*30
56	HDK26162174-1.7	HDS26162174-1.7	162-174		50	40*37*35
57	HDK26175187-1.7	HDS26175187-1.7	175-187	M10*100	50	40*37*22
58	HDK26188200-1.7	HDS26188200-1.7	188-200		25	40*37*24
59	HDK26201213-1.7	HDS26201213-1.7	201-213		25	40*37*26
60	HDK26214226-1.7	HDS26214226-1.7	214-226		25	40*37*26
61	HDK26227239-1.7	HDS26227239-1.7	227-239	M10*100	25	40*37*30
62	HDK26240252-1.7	HDS26240252-1.7	240-252		25	40*37*30

双头强力喉箍

Robust clamp with double bolts

HSQ
Model No.



Automobile water pipe joint, gas pipe joint, oil pipe joint, petroleum, chemical industry,daily life.

- High strength, high elasticity and good corrosion resistance.
- Can withstand the pressure of pipeline system and vibration, effectively prevent leakage and separation.
- easy to install and remove.

Torpie (N.m) ≥ 10

No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2		201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS




No.	CODE	Clamping range (mm)	Bolt
1	HSQ203040	30-40	M6*50
2	HSQ203545	35-45	M6*50
3	HSQ204050	40-50	M6*50
4	HSQ204555	45-55	M6*50
5	HSQ205060	50-60	M6*50
6	HSQ205565	55-65	M6*50
7	HSQ206070	60-70	M6*50
8	HSQ206575	65-75	M6*50
9	HSQ207080	70-80	M6*50
10	HSQ207585	75-85	M6*50
11	HSQ208090	80-90	M6*50
12	HSQ208595	85-95	M6*50
13	HSQ2090100	90-100	M6*50
14	HSQ2095105	95-105	M6*50
15	HSQ20100110	100-110	M6*50
16	HSQ20105115	105-115	M6*50
17	HSQ20110120	110-120	M6*50
18	HSQ20115125	115-125	M6*50
19	HSQ20120130	120-130	M6*50
20	HSQ246070	60-70	M8*60
21	HSQ246575	65-75	M8*60
22	HSQ247080	70-80	M8*60
23	HSQ247585	75-85	M8*60
24	HSQ248090	80-90	M8*60
25	HSQ248595	85-95	M8*60
26	HSQ249010	90-100	M8*60
27	HSQ2495105	95-105	M8*60
28	HSQ24100110	100-110	M8*60
29	HSQ24105115	105-115	M8*60
30	HSQ24110120	110-120	M8*60
31	HSQ24115125	115-125	M8*60
32	HSQ24120130	120-130	M8*60
33	HSQ24125135	125-135	M8*60
34	HSQ24130140	130-140	M8*60
35	HSQ24140150	140-150	M8*60
36	HSQ24150160	150-160	M8*60
37	HSQ24160170	160-170	M8*60
38	HSQ2417080	170-180	M8*60


KF 真空卡箍

Clamping type vacuum quick release flange

material: Stainless steel, aluminum alloy304ss

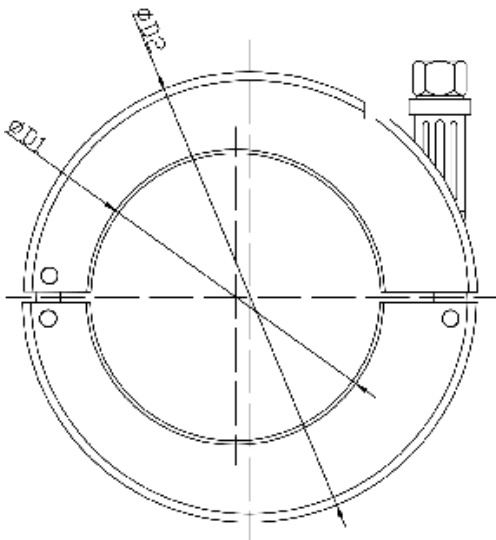

Size	D1	D2	thickness
KF16	23	62	17
KF25	32	68	17
KF40	47	82	17
KF50	68	104	17

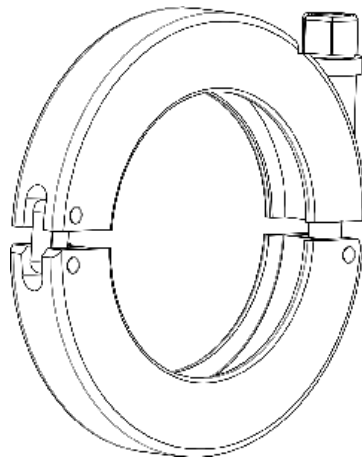

Vacuum clamps are currently widely used in high-tech industries such as semiconductor manufacturing, national defense research, aerospace, biopharmaceuticals, liquid crystals, photovoltaic and solar energy.

- This clamp has the characteristics of good sealing performance, strong adaptability, corrosion resistance, and good stability in temperature and pressure.
- High quality vacuum clamp design should be easy to install and remove, while reducing damage to the sealing surface.

HYS 通径卡箍


Model No. Exhausted clamp



It resists pitting and corrosion by most chemicals, and is particular resistant to saltwater corrosion.

No.	CODE	Clamping range (mm)	pcs/bag
1	HYS9.71316	Φ63	100
2	HYS9.71319	Φ 76	100
3	HYS9.71625	Φ89	100
4	HYS9.71929	Φ100	100
5	HYS11.72232	Φ114	100
6	HYS11.72538	Φ120	100
7	HYS11.73244	Φ127	100

material:201SS

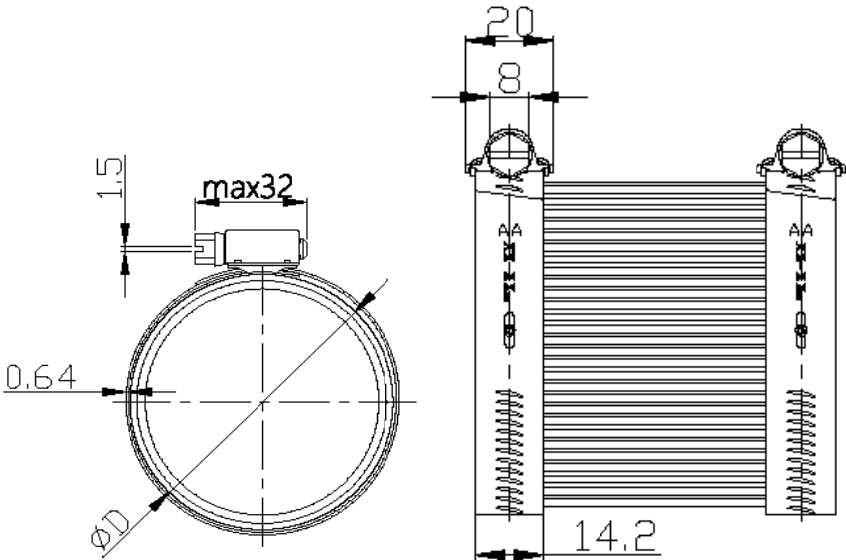

HMT 美式套装

Model No. American suite clamp



No.	CODE	Bandwidth (mm)	Clamping range (mm)
HMT8DIY	HYS9.71316	8	DIY
HMT12.7DIY	HYS9.71319	12.7	DIY
HMT14.2DIY	HYS9.71625	14.2	DIY

No.	Material	Band	Housing	Screw
1	W2	201SS	201SS	Zinc plated steel
2		301SS	301SS	
3		304SS	304SS	
4	W4	201SS	201SS	201SS
5		301SS	301SS	301SS
6		304SS	304SS	304SS

Customize the length of use.

速放卡箍


Quick release hose clamp

HSF

Model No.



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2		201SS	201SS	Zinc plated steel
3		301SS	301SS	
4	W2	304SS	304SS	Zinc plated steel
5		201SS	201SS	
6		301SS	301SS	
7	W4	304SS	304SS	304SS
8		316SS	316SS	316SS

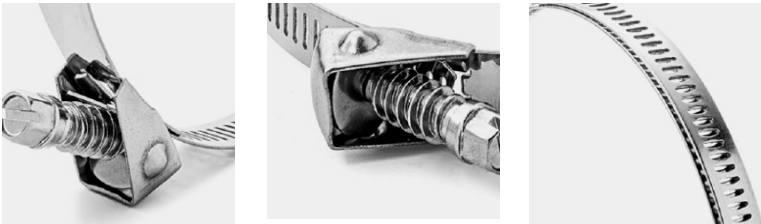

No.	CODE			Clamping range (mm)
1	HSF91732	HSF12.71732	HSF14.21732	17-32
2	HSF91738	HSF12.71738	HSF14.21738	17-38
3	HSF91944	HSF12.71944	HSF14.21944	19-44
4	HSF92751	HSF12.72751	HSF14.22751	27-51
5	HSF93357	HSF12.73357	HSF14.23357	33-57
6	HSF94063	HSF12.74063	HSF14.24063	40-63
7	HSF94670	HSF12.74670	HSF14.24670	46-70
8	HSF95276	HSF12.75276	HSF14.25276	52-76
9	HSF95982	HSF12.75982	HSF14.25982	59-82
10	HSF96589	HSF12.76589	HSF14.26589	65-89
11	HSF97195	HSF12.77195	HSF14.27195	71-95
12	HSF978101	HSF12.778101	HSF14.278101	78-101

Industrial, chemical, daily, automotive, communication equipment

- The torque is less than that of ordinary Other hose clamp,
- which can quickly realize the need for tightening and improve work efficiency.
- It is also very convenient to disassemble.

根据客人需求，可提供其它规格与材质 所有信息仅供参考，不作为技术规范
Other size and materials are available on requestAll the information is for reference only, not as a technical specification

U 型螺栓


U Bolt

material：galvanized iron 304SS



Industrial pipe connection,architectural decoration field,buildings, bridges, ships,medical equipment, furniture

- Simple structure, convenient installation method
- Greater load bearing capacity, long service life, strong corrosion resistance

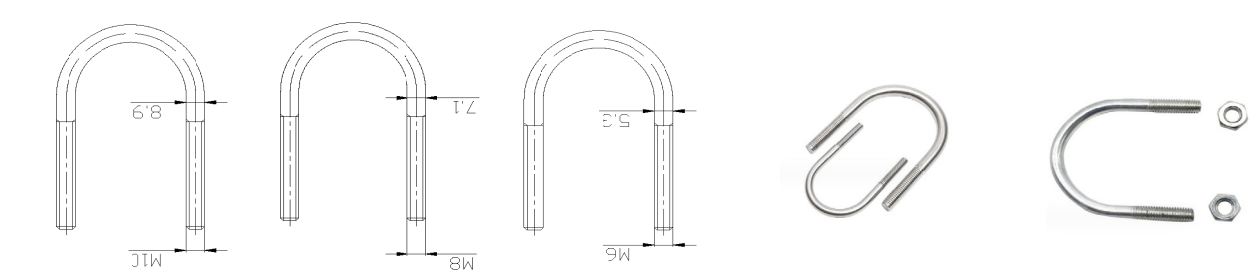

WIRE DIAMETER φ6

No.	Specification	Distance between centers	Altitude	Pipe diameter
1	M6x8	15	25	9
2	M6x10	17	27	11
3	M6x12	19	29	13
4	M6x14	21	32	15
5	M6x16	23	34	17
6	M6x18	26	36	20
7	M6x22	30	42	24
8	M6x25	33	45	27
9	M6x27	35	47	29
10	M6x33	41	53	35
11	M6x38	46	58	40
12	M6x42	50	62	44
13	M6x45	53	65	47
14	M6x48	56	68	50
15	M6x51	59	71	53
16	M6x57	65	77	59
17	M6x60	68	80	62
18	M6x63	71	83	65
19	M6x76	84	96	78
20	M6x89	97	109	91
21	M6x102	110	122	110
22	M6x108	116	128	110
23	M6x114	122	134	116
24	M6x133	141	153	135

WIRE DIAMETER φ8

No.	Specification	Distance between centers	Altitude	Pipe diameter
1	M8x22	32	49	24
2	M8x25	35	52	27
3	M8x27	37	54	29
4	M8x33	43	60	35
5	M8x38	48	65	40
6	M8x42	52	69	44
7	M8x45	55	72	47
8	M8x48	58	75	50
9	M8x51	61	78	53
10	M8x57	67	84	59
11	M8x60	70	87	62
12	M8x63	73	90	65
13	M8x76	86	103	78
14	M8x89	99	116	91
15	M8x102	112	129	104
16	M8x108	118	135	110
17	M8x114	124	141	116
18	M8x133	143	160	135
19	M8x140	150	167	142
20	M8x159	169	189	161
21	M8x168	178	198	170
22	M8x219	229	253	221
23	M8x273	283	313	275


WIRE DIAMETER φ10

No.	Specification	Distance between centers	Altitude	Pipe diameter
1	M10x22	34	53	24
2	M10x25	37	56	27
3	M10x27	39	58	29
4	M10x33	45	64	35
5	M10x38	50	69	42
6	M10x42	54	73	44
7	M10x45	57	76	47
8	M10x48	60	82	50
9	M10x51	63	85	53
10	M10x57	69	91	59
11	M10x60	72	94	62
12	M10x63	75	97	65
13	M10x76	88	110	78
14	M10x89	101	123	91
15	M10x102	114	136	104
16	M10x108	120	142	110
17	M10x114	126	148	116
18	M10x133	145	167	135
19	M10x140	152	174	142
20	M10x159	170	193	161
21	M10x168	180	202	170
22	M10x219	231	253	221
23	M10x273	285	313	275
24	M10x325	337	313	327
25	M10x377	389	313	379

不锈钢钢丝绳锁头
 Stainless steel wire rope lock head

material: galvanized iron / SUS304

The product has a wide range of application scenarios, applied in construction manufacturing, automotive industry, petrochemical industry, etc

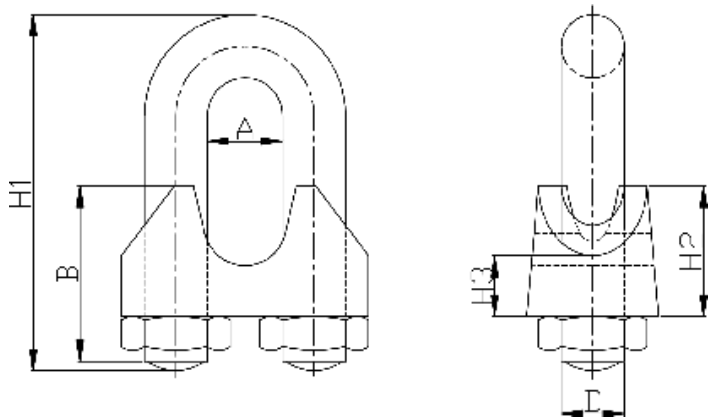

- Made of high-quality stainless steel material, with good glossiness, not easy to rust or corrode
- High hardness, strong toughness, sturdy and durable, not easy to rust, long service life



No.	A	B	D	H1	H2	H3	Packaging quantity	Weight per thousand pieces
M2	4.37	9.89	3	17.5	9.15	4.26	100	7
M3	5.53	9.56	4	20	9.67	5.46	100	11
M4	6.46	11.65	4	21.6	9.85	4	50	12.14
M5	7.25	11.12	5	27.5	10.41	3.98	50	12.65
M6	7.16	17.62	6	32.5	11.82	5.95	50	29.05
M8	9.54	22.71	6	34	15.44	5.83	50	36.14
M10	11.24	29.35	8	44.1	16.57	5.95	50	62.23
M12	15.88	29.35	10	51	17.99	6.61	50	118
M14	15.66	29.35	10	56	21.82	8.34	50	140.46
M16	18.01	29.85	12	80	29.72	9.65	50	258.46




鸡心环
 German type symmetry housing with bandwidth 9mm

material: galvanized iron 304ss



Logistics and transportation industry,the aerospace industry,building trades,water transport industry,performance.



No.	Specification	Inside diameter range	Thickness
1	M2	4.7	0.5
2	M3	5.7	0.5
3	M4	7	0.5
4	M5	8.2	0.8
5	M6	8.5	0.8
6	M8	12	1.2
7	M10	14.6	1.2
8	M12	17.6	1.2
9	M14	19	1.6
10	M16	23.7	2




德中喉箍
German type symmetry hose clamp

HDZ
Model No.



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

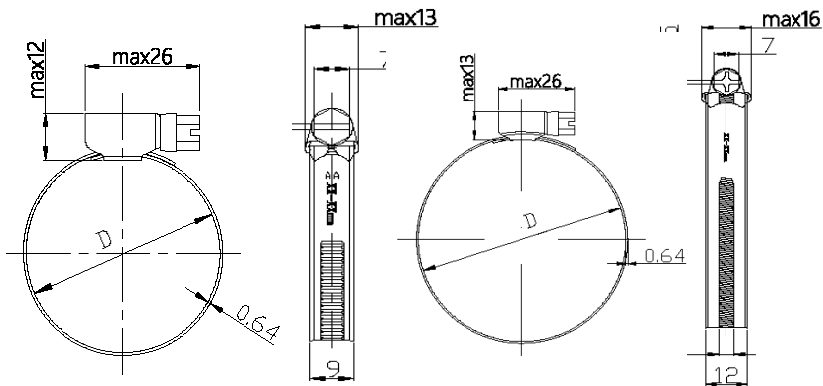

No.	Band Width (mm)	Clamping Range (mm)	Thickness (mm)	pcs/bag	pcs/carton
1	9	8-12	0.64	50	1000
2	9	10-16	0.64	50	1000
3	9	12-20	0.64	50	1000
4	9	16-27	0.64	50	1000
5	9	20-32	0.64	50	500
6	9	25-40	0.64	50	500
7	9	30-45	0.64	50	500
8	9	32-50	0.64	50	500
9	9	40-60	0.64	20	500
10	9	50-70	0.64	20	500
11	9	60-80	0.64	20	500
12	9	70-90	0.64	20	500
13	9	80-100	0.64	20	500
14	9	90-110	0.64	20	500
15	9	100-120	0.64	20	250
16	9	110-130	0.64	20	250
17	9	120-140	0.64	20	250
18	9	130-150	0.64	20	250
19	9	140-160	0.64	20	250
20	9	150-170	0.64	10	250
21	9	160-180	0.64	10	250

No.	Band Width (mm)	Clamping Range (mm)	Thickness (mm)	pcs/bag	pcs/carton
1	12	12-20	0.64	50	1000
2	12	16-27	0.64	50	1000
3	12	20-32	0.64	20	1000
4	12	25-40	0.64	20	1000
5	12	30-45	0.64	20	500
6	12	32-50	0.64	20	500
7	12	40-60	0.64	20	500
8	12	50-70	0.64	20	500
9	12	60-80	0.64	20	250
10	12	70-90	0.64	20	250
11	12	80-100	0.64	20	500
12	12	90-110	0.64	20	500
13	12	100-120	0.64	20	250
14	12	110-130	0.64	20	250
15	12	120-140	0.64	20	250
16	12	130-150	0.64	20	250
17	12	140-160	0.64	20	250
18	12	150-170	0.64	10	250
19	12	160-180	0.64	10	250




德偏喉箍
German type asymmetry hose clamp

HDP
Model No.



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

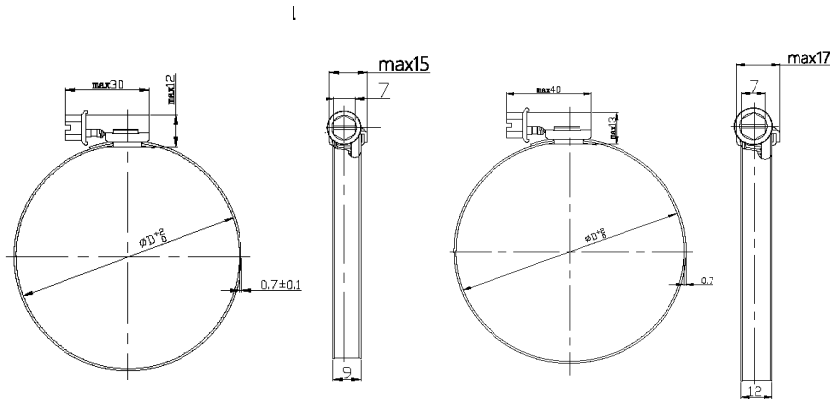

No.	Band Width (mm)	Clamping Range (mm)	Thickness (mm)	pcs/bag	pcs/carton
1	9	8-12	0.64	50	1000
2	9	10-16	0.64	50	1000
3	9	12-16	0.64	50	1000
4	9	16-27	0.64	50	1000
5	9	20-32	0.64	50	500
6	9	25-40	0.64	50	500
7	9	30-45	0.64	50	500
8	9	32-50	0.64	50	500
9	9	40-60	0.64	20	500
10	9	50-70	0.64	20	500
11	9	60-80	0.64	20	500
12	9	70-90	0.64	20	500
13	9	80-100	0.64	20	500
14	9	90-110	0.64	20	500
15	9	100-120	0.64	20	250
16	9	110-130	0.64	20	250
17	9	120-140	0.64	20	250
18	9	130-150	0.64	20	250
19	9	140-160	0.64	20	250
20	9	150-170	0.64	10	250
21	9	160-180	0.64	10	250

No.	Band Width (mm)	Clamping Range (mm)	Thickness (mm)	pcs/bag	pcs/carton
1	12	12-20	0.8	50	1000
2	12	16-27	0.8	50	1000
3	12	20-32	0.8	20	1000
4	12	25-40	0.8	20	1000
5	12	30-45	0.8	20	500
6	12	32-50	0.8	20	500
7	12	40-60	0.8	20	500
8	12	50-70	0.8	20	500
9	12	60-80	0.8	20	250
10	12	70-90	0.8	20	250
11	12	80-100	0.8	20	500
12	12	90-110	0.8	20	500
13	12	100-120	0.8	20	250
14	12	110-130	0.8	20	250
15	12	120-140	0.8	20	250
16	12	130-150	0.8	20	250
17	12	140-160	0.8	20	250
18	12	150-170	0.8	10	250
19	12	160-180	0.8	10	250




大美式喉箍
American style hose clamp

HDM
Model No.



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

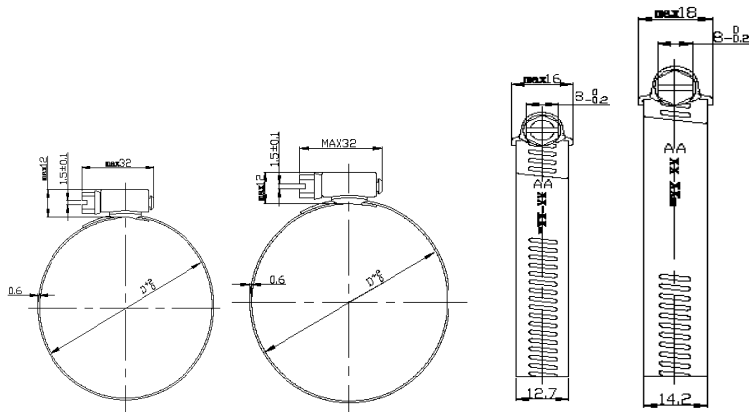

No.	Bandwidth (mm)	Clamping range		Thickness (mm)	pcs/bag	pcs/carton
		inch	(mm)			
1	12.7/14.2	1"	11-25	0.64	50	1000
2	12.7/14.2	1-1/16"	14-27	0.64	50	1000
3	12.7/14.2	1-1/4"	14-32	0.64	50	1000
4	12.7/14.2	1-1/2"	17-38	0.64	20	1000
5	12.7/14.2	1-3/4"	19-44	0.64	20	1000
6	12.7/14.2	2"	27-51	0.64	20	500
7	12.7/14.2	2-1/4"	33-57	0.64	20	500
8	12.7/14.2	2-1/2"	40-63	0.64	20	500
9	12.7/14.2	2-3/4"	46-70	0.64	20	500
10	12.7/14.2	3"	52-76	0.64	20	500
11	12.7/14.2	3-1/4"	59-82	0.64	20	250
12	12.7/14.2	3-1/2"	65-89	0.64	20	250
13	12.7/14.2	3-3/4"	71-95	0.64	20	250
14	12.7/14.2	4"	78-101	0.64	20	250
15	12.7/14.2	4-1/2"	84-114	0.64	20	250
16	12.7/14.2	5"	91-127	0.64	20	250
17	12.7/14.2	5-1/2"	99-139	0.64	20	250
18	12.7/14.2	6"	102-152	0.64	20	250
19	12.7/14.2	6-1/2"	114-165	0.64	10	250
20	12.7/14.2	7"	127-178	0.64	10	250
21	12.7/14.2	8"	130-203	0.64	10	200
22	12.7/14.2	10"	235-254	0.64	10	100
23	12.7/14.2	12"	280-305	0.64	10	100




小美式喉箍
Mini American style hose clamp

HXM
Model No.



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

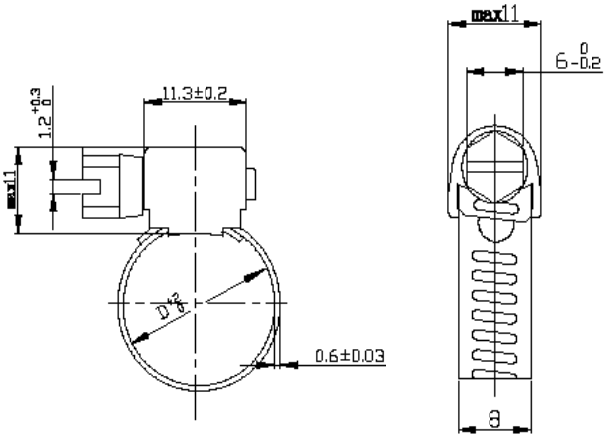

No.	Bandwidth (mm)	Clamping range		Thickness (mm)	pcs/bag	pcs/carton
		inch	(mm)			
1	8mm	8-12	1/2"	0.6	100	2000
2	8mm	6-16	5/8"	0.6	100	2000
3	8mm	10-19	3/4"	0.6	100	2000
4	8mm	10-23	7/8"	0.6	100	2000
5	8mm	11-25	1"	0.6	100	2000

Gas pipe, natural gas pipe, water heater pipe, oxygen pipe, automobile oil pipe

美式扣盖

European style hose clamp

HOS


Model No.

No.	Material	Band	Housing	Screw
1	W2	201SS	201SS	Zinc plated steel
2		301SS	301SS	
3		304SS	304SS	
4	W4	201SS	201SS	201SS
5		301SS	301SS	301SS
6		304SS	304SS	304SS




Clamping range (mm)
11-25
14-27
14-32
17-38
19-44
27-51
33-57
40-63
46-70
52-76
59-82
65-89
71-95
78-101
91-114


Each bandwidth drawing

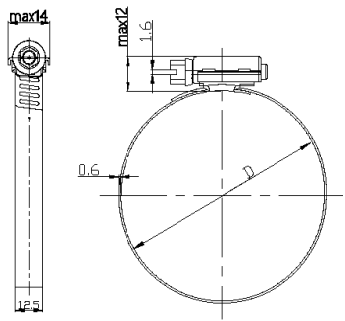

HOS 12.7
THICKNESS:0.6mm
BANDWIDTH:12.7mm

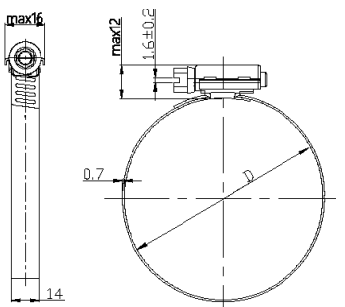

HOS 14.2
THICKNESS:0.7mm
BANDWIDTH:14.2mm

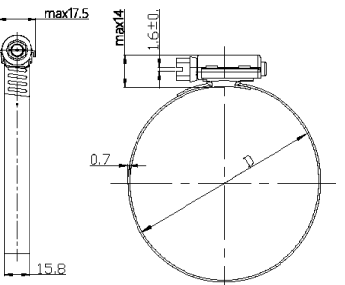

HOS 15.8
THICKNESS:0.7mm
BANDWIDTH:15.8mm

美式重型





Heavy duty American style clamp

HMZ

Model No.

Recommended torque (N.m) : 5~5.5

No.	Material	Band	Housing	Screw
1	W2	201SS	201SS	Zinc plated steel
2		301SS	301SS	
3		304SS	304SS	
4	W4	201SS	201SS	201SS
5		301SS	301SS	301SS
6		304SS	304SS	304SS

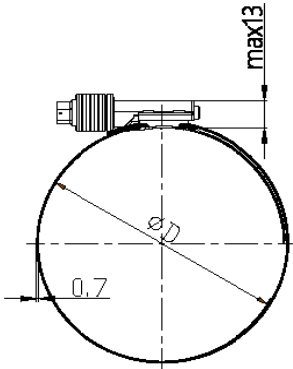
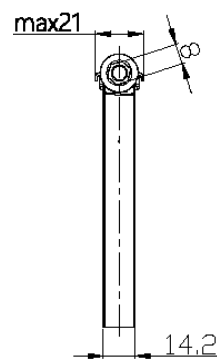


No.	CODE	Clamping range (mm)	pcs/bag	pcs/carton	Carton dimension(cm)
1	HMZ15.82545	25 ~ 45	50	1000	37*20*11
2	HMZ15.83254	32 ~ 54	50	1000	38*27*11
3	HMZ15.84567	45 ~ 67	50	1000	38*27*13
4	HMZ15.85779	57 ~ 79	50	1000	38*27*19
5	HMZ15.87092	70 ~ 92	50	500	38*27*13
6	HMZ15.895117	95 ~ 117	50	500	38*27*15
7	HMZ15.8108131	108 ~ 131	50	500	38*27*18.5
8	HMZ15.8121143	121 ~ 143	50	500	38*27*17.5
9	HMZ15.8134156	134 ~ 156	20	500	38*27*20.5
10	HMZ15.8146169	146 ~ 169	20	500	38*27*24
11	HMZ15.8159181	159 ~ 181	20	500	38*27*34
12	HMZ15.8172193	172 ~ 193	20	500	40*37*27.5
13	HMZ15.8184207	184 ~ 207	20	500	40*37*30
14	HMZ15.8192219	192 ~ 219	20	500	40*37*35
15	HMZ15.8210232	210 ~ 232	20	250	40*37*22
16	HMZ15.851254	220 ~ 254	20	250	40*37*24
17	HMZ15.851273	230 ~ 273	20	250	40*37*26
18	HMZ15.8241292	241 ~ 292	20	250	40*37*26






单耳无极卡箍
Single Ear Hose Clamp

HDE
Model No. material: 304SS

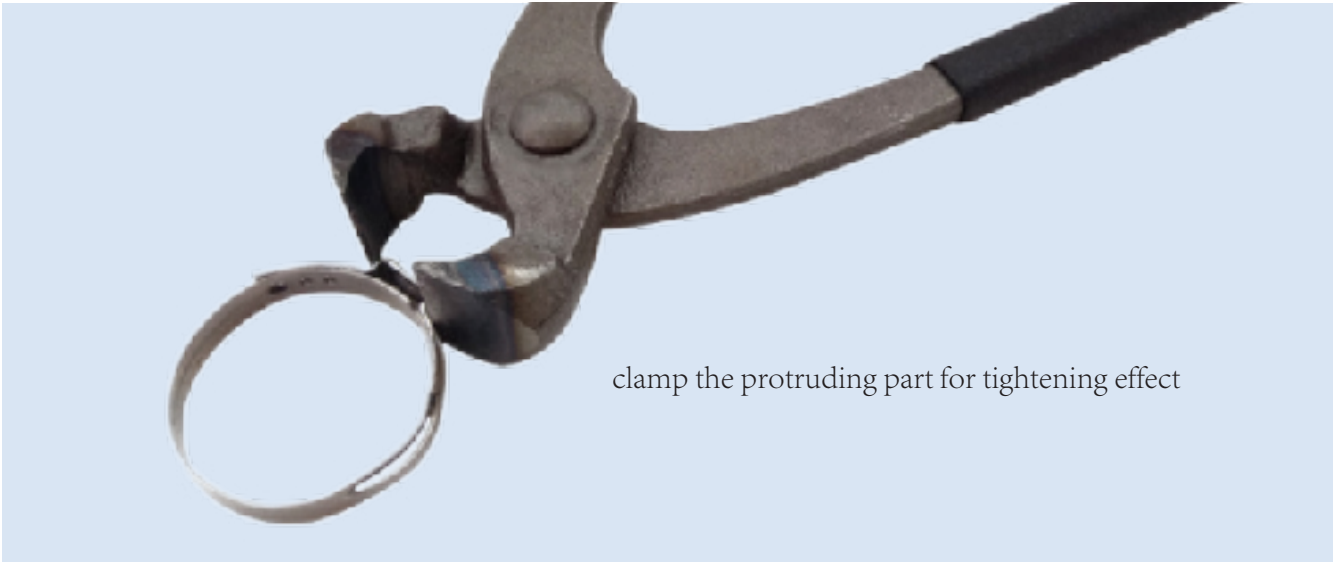


clamp the protruding part for tightening effect

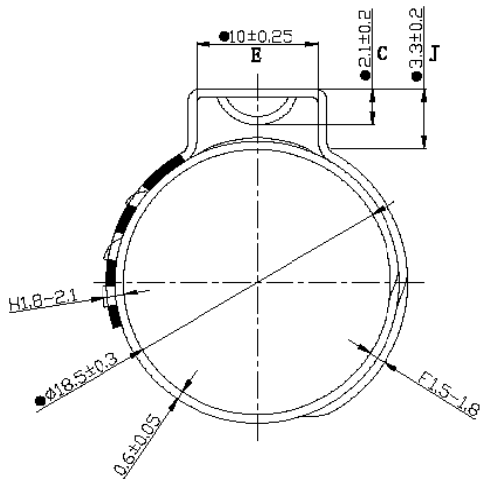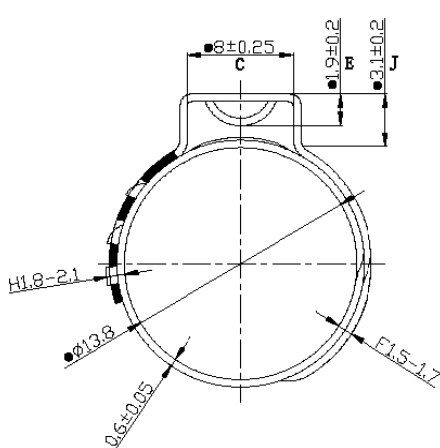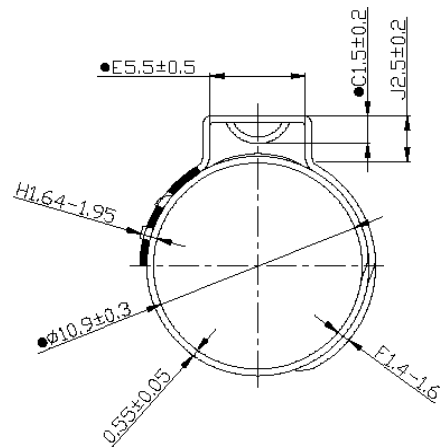

双耳卡箍
Double Ears Hoes Clamp

HSE
Model No. material: galvanized steel

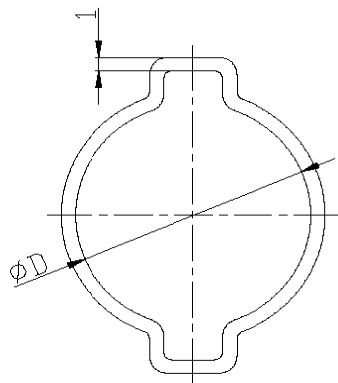


No.	CODE		Clamping range (mm)	pcs/carton
1	HDE5Φ8	HSE5Φ8	Φ8	500
2	HDE5Φ8.7	HSE5Φ8.7	Φ8.7	500
3	HDE5Φ9.5	HSE5Φ9.5	Φ9.5	500
4	HDE5Φ10.5	HSE5Φ10.5	Φ10.5	500
5	HDE7Φ11.9	HSE7Φ11.9	Φ11.9	200
6	HDE7Φ12.3	HSE7Φ12.3	Φ12.3	200
7	HDE7Φ13.3	HSE7Φ13.3	Φ13.3	200
8	HDE7Φ14	HSE7Φ14	Φ14	200
9	HDE7Φ14.5	HSE7Φ14.5	Φ14.5	200
10	HDE7Φ15.3	HSE7Φ15.3	Φ15.3	200
11	HDE7Φ15.7	HSE7Φ15.7	Φ15.7	200
12	HDE7Φ16.2	HSE7Φ16.2	Φ16.2	200
13	HDE7Φ17	HSE7Φ17	Φ17	200
14	HDE7Φ17.5	HSE7Φ17.5	Φ17.5	200
15	HDE7Φ18.5	HSE7Φ18.5	Φ18.5	200
16	HDE7Φ19.2	HSE7Φ19.2	Φ19.2	200
17	HDE7Φ19.8	HSE7Φ19.8	Φ19.8	200
18	HDE7Φ21	HSE7Φ21	Φ21	200
19	HDE7Φ22.6	HSE7Φ22.6	Φ22.6	100
20	HDE7Φ24.1	HSE7Φ24.1	Φ24.1	100
21	HDE7Φ25	HSE7Φ25	Φ25	100
22	HDE7Φ25.6	HSE7Φ25.6	Φ25.6	100
23	HDE7Φ26	HSE7Φ26	Φ26	100
24	HDE7Φ27.1	HSE7Φ27.1	Φ27.1	100
25	HDE7Φ28.6	HSE7Φ28.6	Φ28.6	100
26	HDE7Φ31.6	HSE7Φ31.6	Φ31.6	120
27	HDE7Φ35	HSE7Φ35	Φ35	120
28	HDE7Φ37.6	HSE7Φ37.6	Φ37.6	120
29	HDE7Φ39.6	HSE7Φ39.6	Φ39.6	120
30	HDE7Φ42.5	HSE7Φ42.5	Φ42.5	120
31	HDE7Φ48.5	HSE7Φ48.5	Φ48.5	120
32	HDE7Φ56	HSE7Φ56	Φ56	120
33	HDE7Φ58	HSE7Φ58	Φ58	120
34	HDE7Φ68	HSE7Φ68	Φ68	120
35	HDE7Φ74	HSE7Φ74	Φ74	120
36	HDE7Φ83	HSE7Φ83	Φ83	120
37	HDE7Φ95	HSE7Φ95	Φ95	120
38	HDE7Φ101	HSE7Φ101	Φ101	120
39	HDE7Φ120.5	HSE7Φ120.5	Φ120.5	120

根据客人需求，可提供其它规格与材质 所有信息仅供参考，不作为技术规范
Other size and materials are available on requestAll the information is for reference only, not as a technical specification

弹簧卡箍
Spring clamp

HTH
Model No.

Connect water pipes, fuel pipes, air pipes, etc.

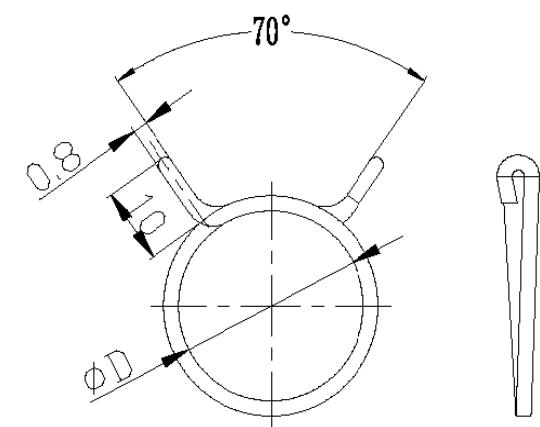

No.	Material Code	surface treatment	Material
1	SG	galvanized	65Mn steel
2	SD	dacromet	65Mn steel
3	SC	Color-harden	65Mn steel


No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
CODE	HTH64	HTH65	HTH66	HTH67	HTH88	HTH89.5	HTH810	HTH810.5	HTH811	HTH811.5	HTH812	HTH812.5	HTH813	HTH813.5	HTH1013
Bandwidth*Thickness	6*0.4	6*0.6	6*0.6	6*0.6	8*0.8	8*0.8	8*0.8	8*0.8	8*0.8	8*0.8	8*0.8	8*0.8	8*0.8	10*1.0	10*1.0
Diameterrange	4	5	6	7	8	9	9.5	10	10.5	11	11.5	12	12.5	13	13.5

No.	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
CODE	HTH1014	HTH1014.5	HTH1015	HTH1016	HTH1017	HTH1018	HTH1219	HTH1220	HTH1221	HTH1223	HTH1224	HTH1225	HTH1226	HTH1527	HTH1528
Bandwidth*Thickness	10*1.0	10*1.0	10*1.0	10*1.0	10*1.0	10*1.0	12*1.0	12*1.0	12*1.0	12*1.2	12*1.2	12*1.2	12*1.2	15*1.5	15*1.5
Diameterrange	14	14.5	15	16	17	18	19	20	21	23	24	25	26	27	28

No.	31	32	33	34	35	36	37	38	39	40	41	42
CODE	HTH1529	HTH1530	HTH1233	HTH12.5	HTH1236	HTH1239	HTH1242	HTH1244	HTH1245	HTH1547	HTH2552	HTH1560
Bandwidth*Thickness	15*1.5	15*1.5	12*1.8	12*1.8	12*1.8	12*1.8	12*1.8	12*1.8	12*1.8	15*2.0	25*2.0	15*2.5
Diameterrange	29	30	33	35	36	39	42	44	45	47	52	60



迷你卡箍
Mini hose clamp

HMN
Model No.

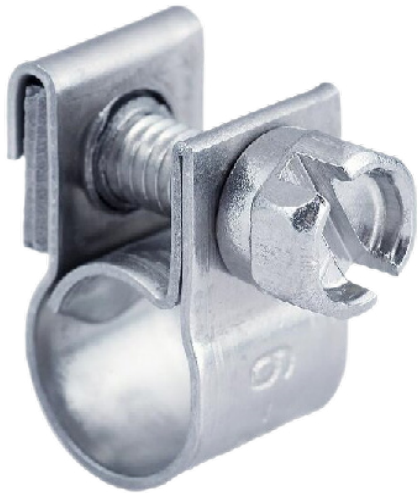

Auto and motorcycle parts, wire and cable, ship, hose

No.	Material	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel
2	W4	201SS	201SS
3		301SS	301SS
4		304SS	304SS

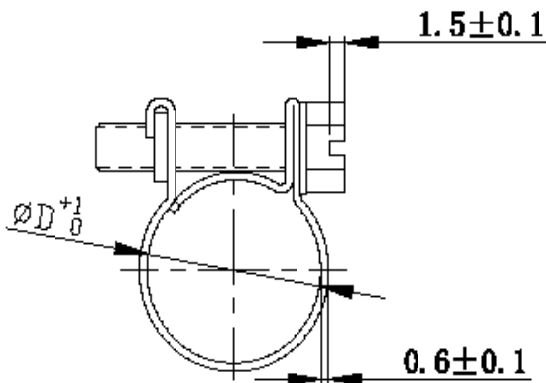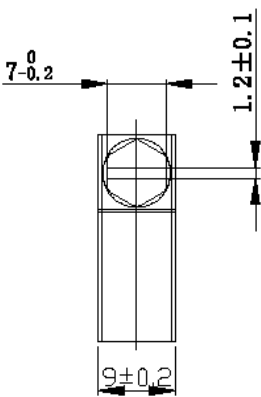

No.	CODE	Diameterrange (mm)	pcs/bag	pcs/carton	Carton Size (cm)
1	HMN979	7-9	200	2000	32*27*15
2	HMN9810	8-10	200	2000	32*27*15
3	HMN9911	9-11	100	2000	32*27*15
4	HMN91012	10-12	100	2000	32*27*15
5	HMN91113	11-13	100	2000	32*27*15
6	HMN91214	12-14	100	2000	32*27*15
7	HMN91315	13-15	100	2000	32*27*15
8	HMN91416	14-16	100	2000	32*27*15
9	HMN91517	15-17	100	2000	32*27*15
10	HMN91618	16-18	100	2000	32*27*15
11	HMN91719	17-19	100	2000	32*27*19
12	HMN91820	18-20	100	2000	32*27*19
13	HMN91921	19-21	50	1000	32*27*15
14	HMN92022	20-22	50	1000	32*27*15
15	HMN92123	21-23	50	1000	32*27*19
16	HMN92224	22-24	50	1000	32*27*19
17	HMN92325	23-25	50	1000	32*27*19
18	HMN92426	24-26	50	1000	32*27*19
19	HMN92527	25-27	50	1000	32*27*19
20	HMN92628	26-28	50	1000	32*27*19
21	HMN92729	27-29	50	1000	32*27*19
22	HMN92830	28-30	50	1000	32*27*15
23	HMN92931	29-31	50	1000	32*27*15
24	HMN93032	30-32	50	1000	32*27*15
25	HMN93133	31-33	50	1000	32*27*15
26	HMN93234	32-34	50	1000	32*27*15

根据客人需求，可提供其它规格与材质 所有信息仅供参考，不作为技术规范
Other size and materials are available on requestAll the information is for reference only, not as a technical specification

T 型强力


Robust clamp with double bolts

HTQ
Model No.



Automobile water pipe joint, gas pipe joint, oil pipe joint, petroleum, chemical industry,daily life.

- The band has strong tension, large torque, and provides uniform sealing pressure.
- 360° no dead corner can effectively prevent leakage.
- The edge and inside of the hoop belt are smoothly treated to protect the hose.
- The welded structure improves safety and reliability.

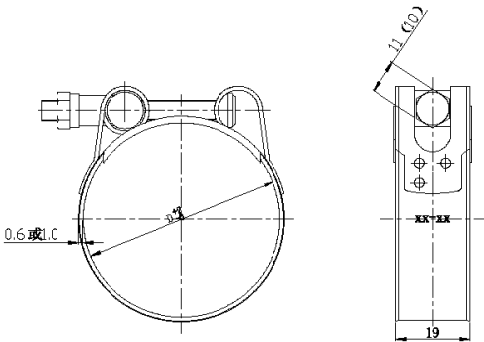

Torque (N.m) ≥ 10

No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

No.	CODE	Clamping range (mm)	Bolt
1	HTQ193540	35-40	M6*50
2	HTQ193843	38-43	M6*50
3	HTQ194146	41-46	M6*50
4	HTQ194451	44-51	M6*50
5	HTQ194856	48-56	M6*50
6	HTQ195159	51-59	M6*50
7	HTQ195462	54-62	M6*50
8	HTQ195765	57-65	M6*50
9	HTQ196068	60-68	M6*50
10	HTQ196371	63-71	M6*50
11	HTQ196775	67-75	M6*50
12	HTQ197078	70-78	M6*50
13	HTQ197381	73-81	M6*50
14	HTQ197684	76-84	M6*50
15	HTQ197987	79-87	M6*50
16	HTQ198391	83-91	M6*50
17	HTQ198694	86-94	M6*50
18	HTQ198997	89-97	M6*50
19	HTQ1992100	92-100	M6*50
20	HTQ1995103	95-103	M8*60
21	HTQ19102110	102-110	M8*60
22	HTQ19108116	108-116	M8*60
23	HTQ19114122	114-122	M8*60
24	HTQ19121129	121-129	M8*60
25	HTQ19127135	127-135	M8*60
26	HTQ19133141	133-141	M8*60
27	HTQ19140148	140-148	M8*60
28	HTQ19146154	146-154	M8*60
29	HTQ19152160	152-160	M8*60
30	HTQ19159167	159-167	M8*60
31	HTQ19165173	165-173	M8*60
32	HTQ19172180	172-180	M8*60
33	HTQ19178186	178-186	M8*60
34	HTQ19184192	184-192	M8*60
35	HTQ19190198	190-198	M8*60

V 型卡箍



V-shaped clamp

MATERIAL:201SS 304SS

In industry, it is suitable for the connection of various pipelines

In the automotive industry, it is applied to the turbo outlet connection and the exhaust system connection

- made of high-quality stainless steel material with high strength, reliability, and corrosion resistance ,has a shining surface and good welding.
- these clamps are easy to remove

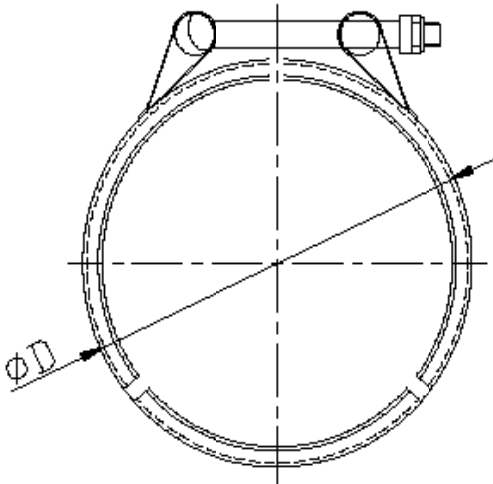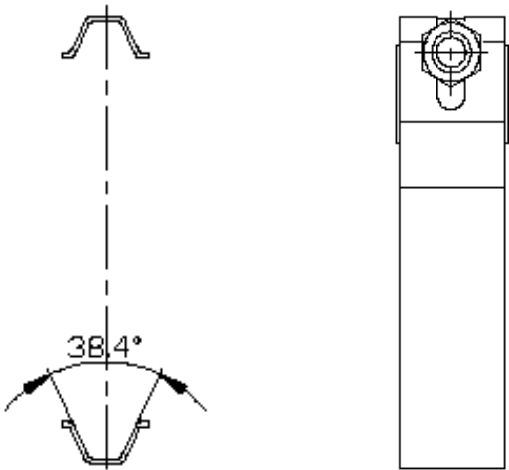


No.	Inch	Clamp inner diameter(mm)	Inner diameter of flange(mm)
1	1.5 ²	60	38.9
2	1.75 ²	66.4	45.3
3	2.0"	72.8	51.6
4	2.25"	79.1	57.9
5	2.36"	81.6	60.5
6	2.5"	85.5	64.3
7	2.75"	91.8	70.6
8	3.0"	98.2	77
9	3.25"	104.5	83.3
10	3.5"	110.9	89.7
11	4.0"	123.5	102.4
12	4.5"	136.3	115.1
13	5.0"	149	127.8
14	6.0"	174.4	153.2

单边骑马卡

single side saddle clamp


material: 201ss 304ss

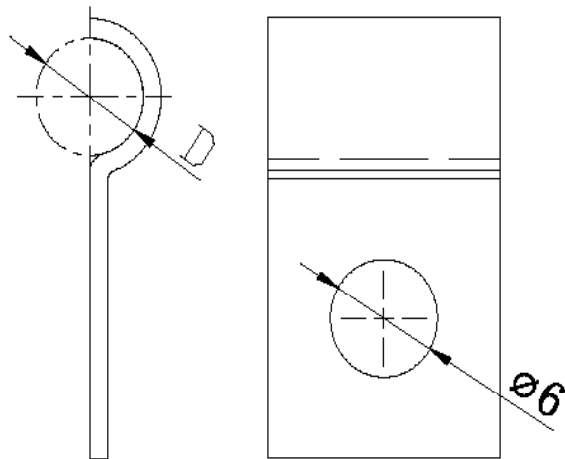

方形骑马卡

square saddle clamp


material: 201SS 304SS

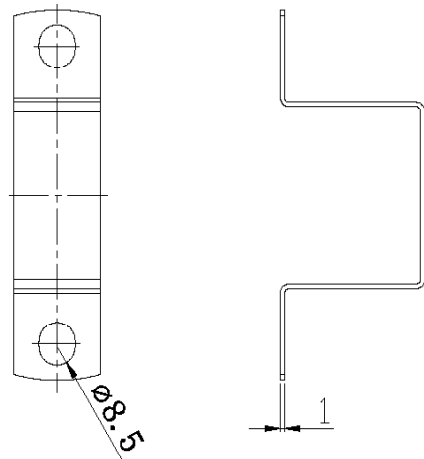

U 型骑马卡

U-type Saddle clamp

MATERIAL: 201SS 304SS

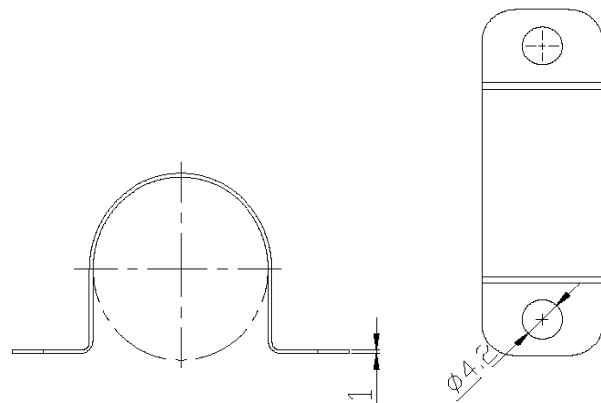

single side saddle clamp

No.	Specification	Overall length	Bandwidth	Clampingrange	thickness
1	M5	22.5	13	5	1
2	M6	22.5	13	6	
3	M8	22.5	13	8	
4	M10	27.5	13	11	
5	M12	30	13	13	
6	M14	32.5	15	15	
7	M16	36	15	17	
8	M18	39	15	19	
9	M20	43.5	17.5	21	
10	M22	46	17.5	23	
11	M25	48	17.5	26	
12	M28	55	18	29	
13	M30	56	18	31	
14	M32-34	60	18	35	
15	M42	74	20	48	
16	M48	80.5	20	56	

square saddle clamp

No.	Outer diameter	Overall length	Bandwidth	Inside width	NegaoThickness	two holes' center distance	weight(g)
1	20x20	64	20	22	18	46	13.965
2	25x25	70	20	28	22.5	52.5	16.661
3	30x30	70	20	32	27.5	57	17.595
4	35x35	82	20	39	32.5	64	21.663
5	40x40	87	20	42	37	69	23.913
6	45x45	91	20	47	43	73	26.458
7	50x50	95	25	52	47.5	78	35.896
8	60x60	105	25	62	58	88	42.052
9	70x70	19	25	73	67	102	47.251

U-type Saddle clamp

No.	Specification	Bandwidth	Clamping range	Thickness	Altitude	two holes' center distance	weight(g)
1	M5	7	5.5	0.4	5.5	14	1.5
2	M8	12	9	0.4	8	22	2.8
3	M10	12	11	0.4	10	24	3
4	M12	12	13	1	12	27	3.2
5	M14	12	15	1	14	33	4
6	M16	18	17	1	16	39	6
7	M20	18	21	1	20	40	6.5
8	M25	18	26	1	25	55	8.5
9	M27	18	28	1	27	56	9.2
10	M32	18	33	1	32	60	9.8
11	M35	18	36	1	35	63	10.2
12	M40	18	41	1	40	68	11
13	M42	18	43	1	42	73	13
14	M50	18	51	1	50	80	14
15	M60	18	61	1	60	94	15.2
16	M70	18	71	1	70	96	18
17	M80	18	81	1	80	103	21
18	M90	18	91	1	90	107	23
19	M100	18	101	1	100	156	25


英式喉箍

British style hose clamp

HYS

Model No.

No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	
5	W4	201SS	201SS	201SS
6		301SS	301SS	301SS
7		304SS	304SS	304SS
8	W5	316SS	316SS	316SS

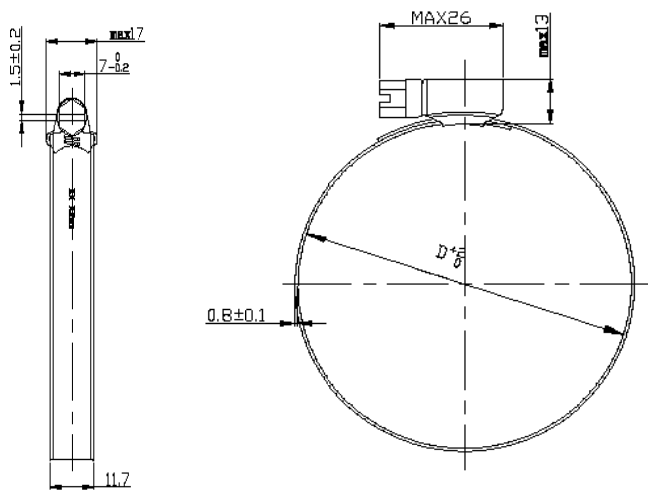


No.	CODE	Clamping range (mm)	pcs/bag	pcs/carton	Carton dimension(cm)
1	HYS9.71316	13-16	10	1000	39*24*18
2	HYS9.71319	13-19	10	1000	39*24*18
3	HYS9.71625	16-25	10	1000	54*30*27
4	HYS9.71929	19-29	10	1000	54*30*27
5	HYS11.72232	22-32	10	500	42*32*23
6	HYS11.72538	25-38	10	500	42*32*23
7	HYS11.73244	32-44	10	500	42*37*23
8	HYS11.73551	35-51	10	500	42*42*23
9	HYS11.73857	38-57	10	500	42*42*31
10	HYS11.74464	44-64	10	500	45*45*31
11	HYS11.75170	51-70	10	500	45*45*31
12	HYS11.77089	70-89	10	500	63*50*41
13	HYS11.780100	80-100	10	500	63*50*41
14	HYS11.7100120	100-120	10	500	63*47*47
15	HYS11.7120140	120-140	10	500	63*50*50

美式手柄

American style hose clamp with handle

HMS

Model No.

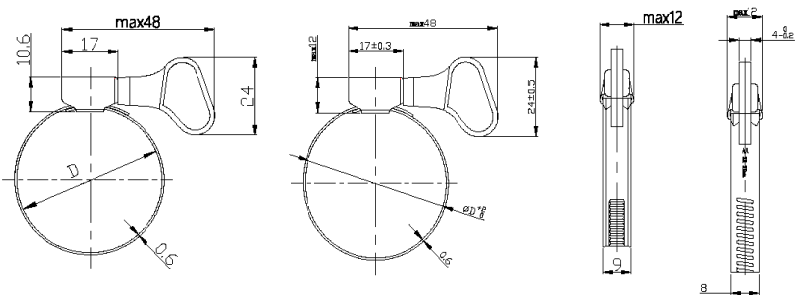


德式手柄

German style hose clamp with handle

HDQ

Model No.



No.	CODE	Clamping range (mm)	pcs/bag	pcs/carton
1	HMS8812	8 ~ 12	100	2000
2	HMS8616	6 ~ 16	100	2000
3	HMS81019	10 ~ 19	100	2000
4	HMS810123	10 ~ 23	100	2000
5	HMS81125	11 ~ 25	100	2000
6	HMS12.71125	11 ~ 25	50	1000
7	HMS12.71427	14 ~ 27	50	1000
8	HMS12.71432	14 ~ 32	50	1000
9	HMS12.71738	17 ~ 38	20	1000
10	HMS12.71944	19 ~ 44	20	1000
11	HMS12.72751	27 ~ 51	20	500

No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W2	201SS	201SS	Zinc plated steel
3		301SS	301SS	
4		304SS	304SS	

No.	CODE	Clamping range (mm)	pcs/bag	pcs/carton
1	HDS9812	8 ~ 12	50	1000
2	HDS91016	10 ~ 16	50	1000
3	HDS91220	12 ~ 20	50	1000
4	HDS91627	16 ~ 27	50	1000
5	HDS92032	20 ~ 32	50	500
6	HDS92540	25 ~ 40	50	500
7	HDS93045	30 ~ 45	50	500
8	HDS93250	32 ~ 50	50	500
9	HDS94060	40 ~ 60	20	500
10	HDS95070	50 ~ 70	20	500
11	HDS96080	60 ~ 80	20	500
12	HDS97090	70 ~ 90	20	500
13	HDS980100	80 ~ 100	20	500



连胶条卡箍

Fixing clamps with rubber



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W4	201SS	201SS	201SS
3		301SS	301SS	301SS
4		304SS	304SS	304SS

HLJ
Model No.



APPLICATION

Mainly used in vehicles, ships, machinery and equipment

FEATURE

- Strong and durable, which has a good protective effect on the surface of the fixed wire.
- All steel and rubber combination structure, high strength, strong impact resistance.
- good corrosion resistance, long service life.

Specification of Fixing clamp with rubber

No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
Clampingrange	Φ4	Φ6	Φ8	Φ10	Φ12	Φ14	Φ16	Φ18	Φ20	Φ22	Φ24	Φ26	Φ28	Φ30	Φ32	Φ34	Φ36	Φ38	Φ40	Φ42	Φ44
Bandwidth (mm)	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
Bandthickness(mm)	0.6	0.6	0.6	0.6	0.6	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
aperture (mm)	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3

No.	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
Clampingrange	Φ46	Φ48	Φ50	Φ6	Φ8	Φ10	Φ12	Φ14	Φ16	Φ18	Φ20	Φ22	Φ24	Φ26	Φ28	Φ30	Φ32	Φ34	Φ36	Φ38	Φ40
Bandwidth (mm)	12	12	12	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15
Bandthickness(mm)	0.8	0.8	0.8	0.6	0.6	0.6	0.6	0.6	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
aperture (mm)	5.3	5.3	5.3	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4

No.	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
Clampingrange	Φ42	Φ44	Φ46	Φ48	Φ50	Φ14	Φ16	Φ18	Φ20	Φ22	Φ24	Φ26	Φ28	Φ30	Φ32	Φ34	Φ36	Φ38	Φ40	Φ42	Φ44
Bandwidth (mm)	15	15	15	15	15	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Bandthickness(mm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
aperture (mm)	6.4	6.4	6.4	6.4	6.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4

No.	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84
Clampingrange	Φ46	Φ48	Φ50	Φ16	Φ18	Φ20	Φ22	Φ24	Φ26	Φ28	Φ30	Φ32	Φ34	Φ36	Φ38	Φ40	Φ42	Φ44	Φ46	Φ48	Φ50
Bandwidth (mm)	20	20	20	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
Bandthickness(mm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
aperture (mm)	8.4	8.4	8.4	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5

根据客人需求，可提供其它规格与材质 所有信息仅供参考，不作为技术规范
Other size and materials are available on requestAll the information is for reference only, not as a technical specification

HSG 双钢丝卡箍


Model No. Double wires hose clamp



No.	Material	Band	Housing	Screw
1	W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
2	W4	201SS	201SS	201SS
3		301SS	301SS	301SS
4		304SS	304SS	304SS

To be used for vehicles, ships, diesel engines, gasoline engines, machine tools, fire, and other mechanical equipment,kinds type of hose's connection and seal.

- The double wires hose clamp is a clamp whish is surrounded by two steel wires.
- The clamp has the characteristics of beautiful appearance, easy to use, strong tightening force and good sealing performance.

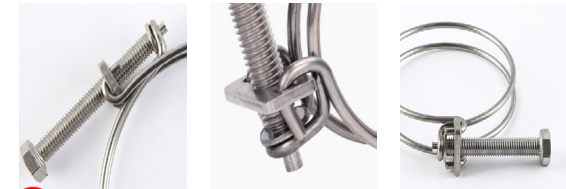

No.	CODE	Clamping range (mm)	Wire diameter (mm)	Bolt (mm)	pcs/carton	Carton Size (cm)
1	HSG1.51114	11-14		M5*30	2000	38*27*14
2	HSG1.51316	13-16	Φ1.5	M5*30	2000	38*27*14
3	HSG1.51518	15-18	Φ1.5	M5*30	2000	38*27*14
4	HSG1.8172	17-20	Φ1.8	M5*30	2000	38*27*14
5	HSG1.81922	19-22	Φ1.8	M5*30	1000	38*27*17
6	HSG1.82024	20-24	Φ1.8	M5*30	1000	38*27*17
7	HSG1.82226	22-26	Φ1.8	M5*30	1000	38*27*17
8	HSG1.82428	24-28	Φ1.8	M5*30	1000	38*27*17
9	HSG2.2263	26-30	Φ2.2	M6*40	500	38*27*19
10	HSG2.22832	28-32	Φ2.2	M6*40	500	38*27*19
11	HSG2.23135	31-35	Φ2.2	M6*40	500	38*27*24
12	HSG2.23336	33-36	Φ2.2	M6*40	500	38*27*24
13	HSG2.23438	34-38	Φ2.2	M6*40	500	38*27*24
14	HSG2.2354	35-40	Φ2.2	M6*40	500	38*27*24
15	HSG2.23742	37-42	Φ2.2	M6*40	500	38*27*24
16	HSG2.24045	40-45	Φ2.2	M6*40	500	38*27*24
17	HSG2.24246	42-46	Φ2.2	M6*40	500	38*27*34
18	HSG2.24348	43-48	Φ2.2	M6*50	500	38*27*34
19	HSG2.2455	45-50	Φ2.2	M6*50	500	38*27*34
20	HSG2.24752	47-52	Φ2.2	M6*50	500	38*27*34
21	HSG2.25055	50-55	Φ2.2	M6*50	500	38*27*19
22	HSG2.25358	53-58	Φ2.2	M6*50	250	38*27*19
23	HSG2.2556	55-60	Φ2.2	09.9W	250	38*27*24
24	HSG2.25462	54-62	Φ2.2	09.9W	250	38*27*24
25	HSG2.26065	60-65	Φ2.2	M6*60	250	38*27*29
26	HSG2.56368	63-68	Φ2.5	09.9W	250	38*27*29
27	HSG2.5657	65-70	Φ2.5	M6*70	250	38*27*34
28	HSG2.57075	70-75	Φ2.5	M6*70	250	38*27*34
29	HSG2.5758	75-80	Φ2.5	M6*70	250	38*27*29
30	HSG2.58085	80-85	Φ2.5	M6*70	250	38*27*29
31	HSG2.5849	84-90	Φ2.5	M6*70	250	38*27*34
32	HSG2.59095	90-95	Φ2.5	M6*70	250	38*27*34
33	HSG2.5941	94-100	Φ2.5	M6*80	250	38*27*34
34	HSG2.598105	98-105	Φ2.5	M6*80	250	41*32*31
35	HSG2.510311	103-110	Φ2.5	M6*80	250	41*32*31
36	HSG2.511312	113-120	Φ2.5	M6*80	250	41*32*31


灯笼吊卡

U-shaped elevator clamp

material: galvanized iron 304ss



- steel and rubber combination structure are stronger enough to withstand greater pressure and impact
- The rubber protective sleeve fits the pipe

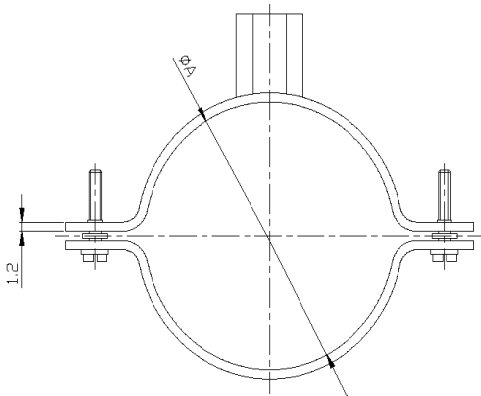

No.	Specification	Inside diameter range	bandwidth	Thickness	nut	screw
1	φ16	15-19	20	1.2	M8	M6 Philip's head screw
2	φ20	17-23	20	1.2	M8	M6 Philip's head screw
3	φ25	24-26	20	1.2	M8	M6 Philip's head screw
4	φ28	26-30	20	1.2	M8	M6 Philip's head screw
5	φ32	32-36	20	1.2	M8	M6 Philip's head screw
6	φ40	38-42	20	1.2	M8	M6 Philip's head screw
7	φ50	48-51	20	1.2	M8	M6 Philip's head screw
8	φ58	55-60	20	1.2	M8	M6 Philip's head screw
9	φ63	63-68	20	1.2	M8	M6 Philip's head screw
10	φ75	75-80	20	1.2	M8	M6 Philip's head screw
11	φ102	88-92	20	1.2	M8	M6 Philip's head screw
12	φ110	100-105	20	1.2	M10	M6 Philip's head screw
13	φ125	110-114	20	1.2	M8+M10	M6 Philip's head screw
14	φ140	125-130	20	1.2	M8+M10	M6 Philip's head screw
15	φ150	138-143	20	1.2	M8+M10	M6 Philip's head screw
16	φ160	148-153	20	1.2	M8+M10	M6 Philip's head screw
17	φ180	159-166	20	1.2	M8+M10	M6 Philip's head screw
18	φ200	182-185	20	1.2	M8+M10	M6 Philip's head screw

根据客人需求，可提供其它规格与材质 所有信息仅供参考，不作为技术规范
Other size and materials are available on requestAll the information is for reference only, not as a technical specification



MG type hose clamp



Tri Clamp



P-type pipe clamp



Tiger Clip C Type



No-Hub Coupling with
Stainless Steel Clamps



Cast iron tiger clamp

根据客人需求，可定制其它规格与材质
Other specifications and materials can be customized
according to customer needs

Besides the main basic products, we can also provide OEM or ODM service according to customers' requirements. We have one professional R&D engineering team to support each different requirement.

YUE BANG

Focus on the future
Outlook for the next

